

Hideaway® deluxe range installation instructions

PLEASE READ

IMPORTANT INSTALLATION INFORMATION:

For handle pull models KK2H, KK3H, KK4H, KK12H, KK7H: If hinges are used that do not allow the door to clear the opening fully, allow an extra 10mm width. Installation also requires that the top door hinge be 150mm from the top of the door to allow clearance for the bin handle. Refer to our website or brochure for the measurements related to your Hideaway Bin.

Step 1 - Unpack Hideaway Bin

- Remove all polystyrene.
- Remove the bucket/s.
- Please leave the Care and Maintenance instructions inside the bucket for owner.

Step 2 - Remove the runners from unit (see Fig 2a & 2b)

- Place the mounting panel upside down on a flat surface with the runners facing upwards.
- Fully extend the runners.
- Find the black levers located on the outer side of both the left and right runner.
- Simultaneously, push the left lever down and the right lever up and pull inner of the runners towards you until it separates completely from the unit. Set runner inner with collar, handle/door bracket attached aside in a safe location.
- Push the outer runners attached to the mounting panel back inside the unit.

Step 3 - Remove the friction-fitted lid from mounting panel (see Fig 3a, 3b & 3c)

- Mounting panel should still be upside down on a flat surface with the runners facing upwards.
- To remove the friction-fitted lid - push firmly down on the lid at the back of the unit.
- Push firmly, distributing pressure to both sides of lid to ensure the lid clears the hooks located on the left and right hand sides of the mounting panel (fig 3b).
- Simultaneously, pull the friction-fitted lid forwards until it clears the mounting panel (fig 3c).
- Pull the foam pad clear of the mounting panel. Set aside, leaving the plastic cover on.

Step 4 - Top mounting bins only: Install your bin within your cupboard / carcass

- Position the mounting panel (now clear of runner inner and collar as well as friction-fitted lid and foam pad) inside, beneath your carcass / shelf.
- Position within the centre of the carcass and ensure the front of the mounting panel is sitting flush with the front of the carcass. Mounting points are located on the top of the mounting panel for fixing. Secure the mounting panel into place with the Surefix screws provided. Any additional mounting points added will null and void warranty.

Step 5 - Side Mounting Installation within your cupboard / carcass

- Your unit has side mounting points, as shown in Fig 1. If side mounting, the internal space of the cabinet must be within the advertised width.
- The side mounting points are to be secured with the Surefix screws and washers provided.

Step 6 - Reinstall the friction-fitted lid and foam into mounting panel

- Rest the foam on top of the friction-fitted lid - the flat side of the friction-fitted lid should be towards the ground with the folds facing upwards.

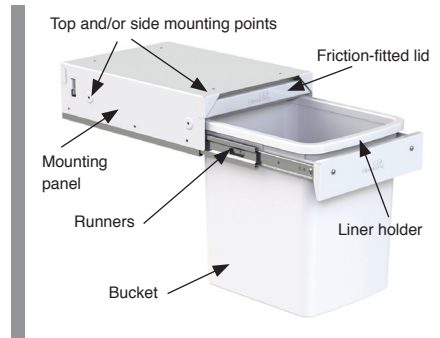


FIG 1 - Bin Parts

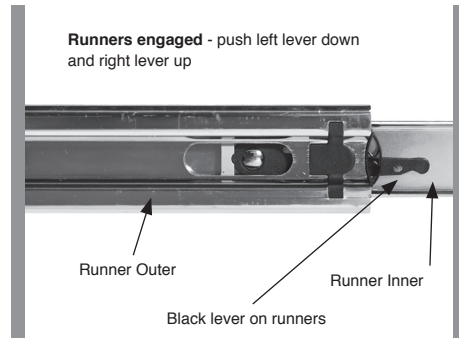


FIG 2a - Removing Runners

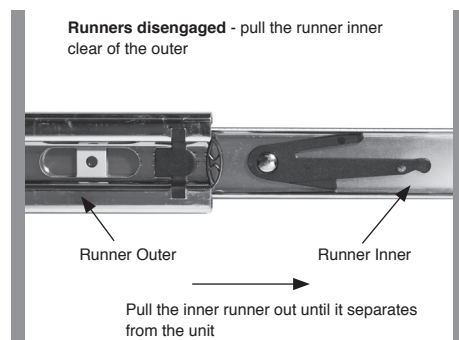


FIG 2b - Removing Runners

- Slide the friction-fitted lid and foam inside the mounting panel, stopping just before the rear hooks. (Note: the large fold on the friction-fitted lid sits at the front of the unit, and the rear of the lid has the slots which reconnect with the hooks located on the mounting panel at the rear).
- Simultaneously, with one hand, push firmly up on the back of the friction-fitted lid, push the lid above the hooks and drop into location. Whilst this is happening, with the other hand push the front of the lid upwards to ensure it rests on the metal support - located at the front of the mounting panel (fig 3c).
- The lid should move up and down slightly, with ease indicating correct installation.

Step 7 - Reattach the runner inner and collar to the installed mounting panel

- Ensure the outer runners attached to the mounting panel are pushed all the way inside the unit. On these outer runners ensure the inner slider is pulled all the way towards the front of the unit.
- Line up the inner runners (with collar attached) to the outer runners that are attached to the mounting panel (which is now installed in your cupboard).
- Push the inner runners all the way in until the unit closes to engage the runners. Pull unit open again. The runners should move with ease indicating correct positioning.

Step 8 - Fix cabinet fascia to door bracket of bin (door pull bins only)

- Place a 4mm self tapping screw into the centre hole of the door bracket - ensure the point of the screw is only protruding approx 3mm.
- With the bin closed fully, align the front fascia of the cupboard against the door bracket. A small hit with your hand to the location of the screw will help provide a drilling indication.
- Lie cabinet fascia on a flat surface with the internal part of the door facing upwards.
- Remove the runner inner once again (refer step 2 - however, push the left lever up and the right lever down) and align the door bracket with the drilling mark on your cabinet fascia. Drill and tighten centre screw, fixing the door bracket of the bin to the cabinet fascia.
- Reinstall the runner inner (now with the cabinet fascia attached) to the runners inside the mounting panel (refer step 6).
- Check positioning and align, proceed to marking, screwing and tightening the remaining screws. Side, up & down adjustment is provided on the door bracket.

Step 9 - Place bin bucket/s into checkouts on collar

- Fully extend the runners.
- Place bucket/s into the checkouts provided on the collar of the unit. If the bucket/s do not sit within these checkouts the unit will not close properly.

Installation complete!




Push firmly on the back of the unit to ensure the lid clears the hooks located on the right and left hand sides of top mounting panel

FIG 3a



FIG 3b

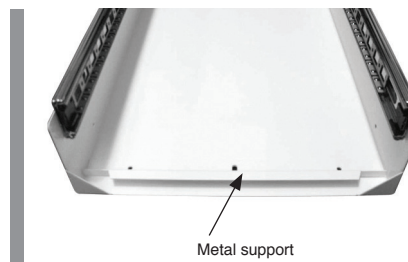

The unit should look like this with the friction fitted lid and and foam pad removed

FIG 3c

Need more info?

NEW ZEALAND

Phone 09 426 7456

Email info@hideawaybins.co.nz

Web www.hideawaybins.co.nz

AUSTRALIA

Freephone 1800 042 642

Email info@hideawaybins.co.nz

Web www.hideawaybins.com.au